



## Venom Turbo 60 Nozzle

The Venom Turbo 60 Hose Nozzle is the most compact in the range, boasting all the key features found throughout the Venom Turbo Nozzle range. It has a maximum flow of 60 Litres per minute and a maximum working pressure of 16 bar and is most commonly used on hose reel appliances. Suitable for working as low as 3 bar. Manufactured in accordance with BSEN-15182.

### FEATURES

Flow pattern identification.

Hard Anodized Aluminium.

Laser engraved settings.



Simple to operate (¼ turn from straight stream to fog).

Raised identification lug on the bumper to assist in low visibility operations.

Easy to service and repair.

Compatible with foam making equipment.

Technical Specification	
Weight	1.85kg
Materials	Body & Valve - Hard Anodized Aluminium, Handle - ABS Bumper - Rubber
Max Sealing Test Pressure	24 bar, factory tested 30 bar
Max Strength Test Pressure	24 bar, factory tested 30 bar
Max Use Working Pressure	16 bar
Advised Working Pressure	6 bar
Minimum Operational Pressure	3 bar
Max Fog Angle	110°
Throw Range	35m at 6 bar
Flow Range	15 litres/min at 6 bar 30 litres/min at 6 bar 45 litres/min at 6 bar 60 litres/min at 6 bar
Coupling Options	Instantaneous BS336 BSP, NST, Storz and many more

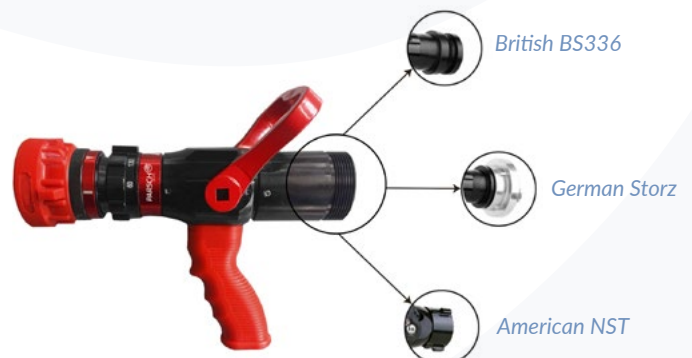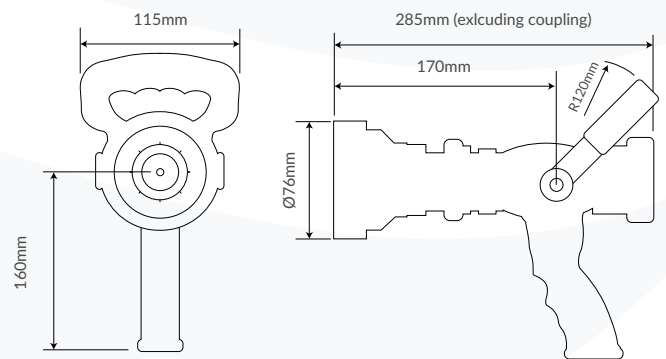


## VENOM TURBO 60 NOZZLE OPERATION

### KEY PARTS :

- 1 **Valve Close:**  
Push the handle forward
- 2 **Valve Open:**  
Push the handle backward
- 3 **Flow Rate Adjust:**  
Twist the flow adjust ring to obtain required flow rate
- 4 **SS-FOG Pattern:**  
Twist the rubber bumper



## NOZZLE PERFORMANCE

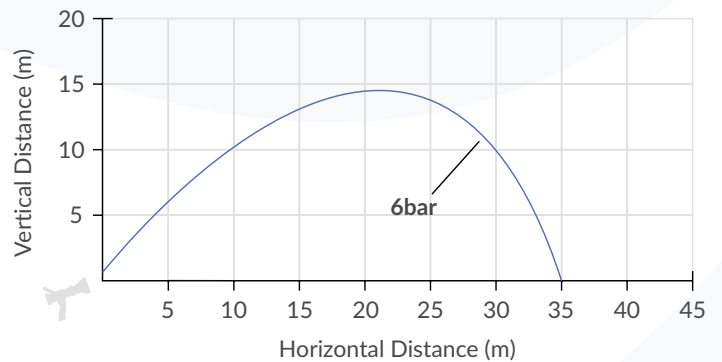

Testing Enironment: 30° throw angle, wind speed ≤2m/s